thin•Pod TR2220

Hardware Technical Specs:

Central Processor

SiS 550x 200 MHz or 250 MHz

Memory

Flash ROM	
32 MB standard	64 MB optional
Memory Slot	
64 MB SO-DIMM standard	128 MB SO-DIMM optional

Graphics

8-MB SDRAM discrete graphics memory.

Mode	Refresh Rates	Color Depth
640 x 480	60, 72, 75, 90, or 100 Hz	8, 16, 24, or 32-bit
800 x 600	60, 70, 75, 90, or 100 Hz	8, 16, 24, or 32-bit
1024 x 768	60, 72, 75, 90, or 100 Hz	8, 16, 24, or 32-bit
1280 x 1024	43, 60, or 70 Hz	8, 16, 24, or 32-bit
1600 x 1200	60, 66, 76, or 85 Hz	8 ,16-bit or 24-bit

Input/Output/ Peripheral

- **Keyboard, mouse:** Supports PS/2, or USB
- **Printer:** Local and/or network printers
- **Video:** VGA-type video output (DB-15)

Audio Output

1/8-inch mini, full 16-bit stereo, 44-kHz sample rate

I/O ports and connectors

Two PS2, Two USB ports, 1 parallel, RJ-45

Dimensions H x W x D

Width x Depth x Height: ~190 mm x ~150 mm x ~40mm

Weight

Unit Weight: ~1.32 lbs. (0.6Kg)

Environmental Operating Temperature

41°F to 95°F (5°C – 40°C)

Temperature Storage

14°F to 140°F (-10°C – 60°C)

Humidity

- 90% Maximum (non-condensing)
- Operating Altitude 0 – 10,000 feet (0 to 3050meters)

Security

Security lock slot (cable lock sold separately)

Power

- Full Range auto-sensing 100 – 240 Vac at 60Hz / 50Hz
- Energy saving automatic power-down

Regulatory Compliance

FCC Class B; CE Mark; UL, C-UL, TUV

Software or Applications Compatibility

Firmware Compatibility

- Microsoft Windows CE.NET v4.2
- Linux or other Open Source OS

Server OS Compatibility

Microsoft Windows NT Server 4.0	Windows NT Server 4.0 Terminal Services
Windows 2000 Server	Windows 2000 Server Terminal Services
Windows 2000 Advance Server	Windows 2003 Advance Server Terminal Services

Citrix MetaFrame	

Communications

- Microsoft RDP 5.0
- Citrix ICA 7.0
- XDM
- VNC
- Tarantella v3.30.923
- telnet

Terminal Emulations

- Powerterm
- IBM TN3270
- TN5250
- Digital VT52 / 100 / 200 / 320 / 420 / 520 / 525
- ANSI-ANSI-BBS
- SCO-ANSI
- AT386
- Others Wyse 50 / 60, DG D-412
- Televideo TVI 925 / 950
- Hp 700/92, 700/96

Networking

- TCP/IP with DNS and DHCP
- 10/100 BaseT Fast Ethernet, twisted pair (RJ-45)
- VNC Client & Server
- Point-to-Point over Ethernet (PPPoE),
- Point-to-Point Tunneling Protocol (PPTP),
- SSH Client
- Wake on LAN (WOL),
- PXE
- Multiple master browser support on ICA
- Supports Citrix load balancing on ICA
- VPN

Language

English Standard, Other languages available for customization (Project basis)

Overview

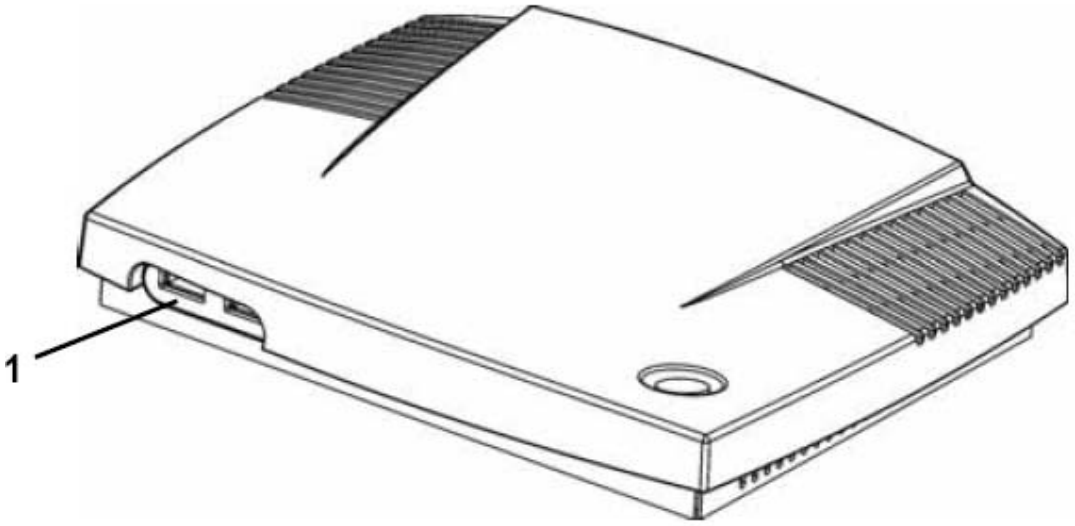

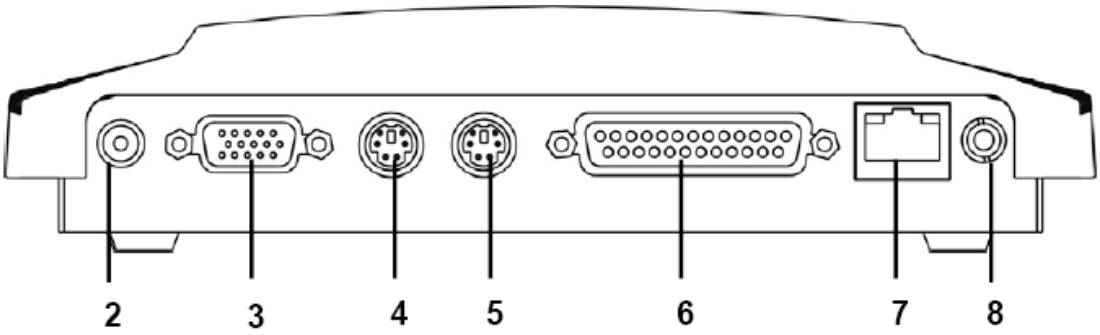

1. USB Connectors
2. DC Power Input
3. Video Connector
4. PS/2 -Mouse
5. PS/2 –Keyboard
6. Parallel Connector
7. RJ-45
8. Audio Connector - Line Out